


Roto Drum - RD

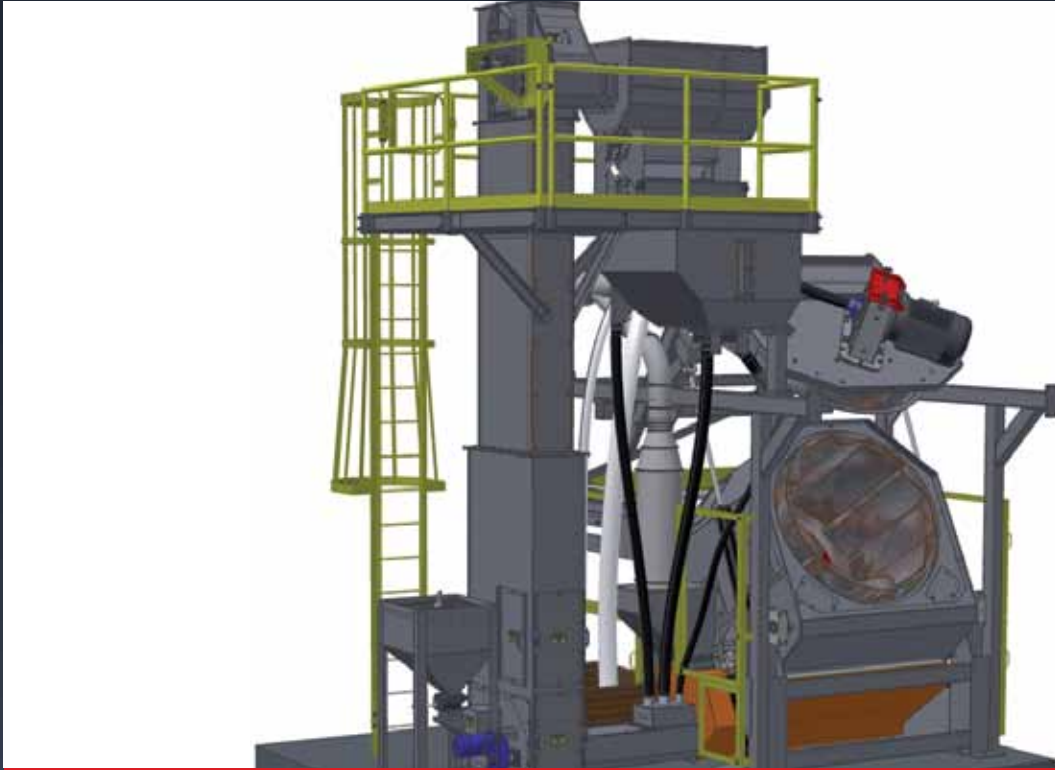

Models: 3 / 6 / 8 / 14 / 22 / 34 / 45 RD

Pangborn Roto Drum Blasting Machines are cost-effective and space-saving rotating drum systems. Versatile, solid manganese drums allow efficient tumbling of parts with no pinch points.

ROTO DRUM



3 / 6 / 8 / 14 / 22 / 34 / 45 RD

Technical Data

ROTO DRUM's		3RD	6RD	8RD	14RD	22RD	34RD	45RD
Blast Wheel	HP	15/20	15/20	15/20/25	50/60	50/60/75	75/100/125	75/100/125
Load Capacity - Volume	FT3	3	6	8	14	22	34	45
Load Capacity - Weight	LBS	550	1100	1760	3500	5500	8500	11250
Drum Material Thickness	IN	3/8	3/8	3/8	5/8	5/8	3/4	3/4
Min. Parts Size (Diameter)	IN	3/16	3/16	3/16	1/2	1/2	1/2	1/2
Heaviest Single Part	LBS	50	50	100	400	600	600	600

FEATURES AND BENEFITS

- 5/8 thick manganese steel, solid welded drum (zero catch points, no sharp edges to nick or damage parts)
- Replaceable actuator cone (different shapes for different part types)
- Adjustable drum angles with shock loading suspension (easily modify tumbling dynamics)
- 5 point drum support (Better stability- durability)
- 4 drive wheels for drum rotation (polyurethane lined steel core for durability)
- Drive wheels for drum mounted with keyless bushings (ease of maintenance)
- Abrasion Resistant (AR) screws (longer life)
- Machine can be fully automated (higher productivity)
- Leak resistant piece door (maintenance advantages)
- Canted vanes available for wider blast pattern (better cleaning/shorter cycle times)

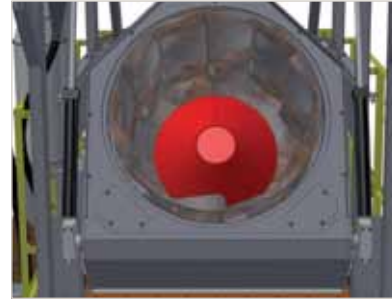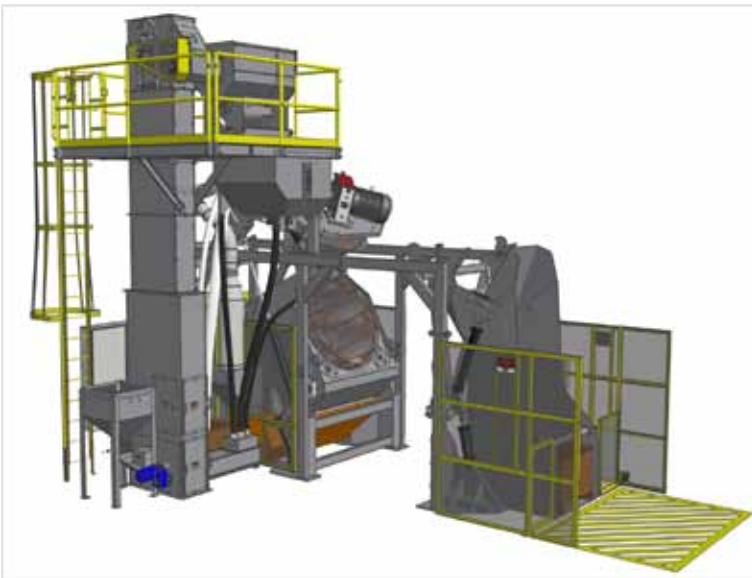

Please contact us for more information or visit us at: www.pangborn.com or www.pangborngroup.com

Pangborn LLC
 4630 Coates Drive
 Fairburn, GA 30213
 Toll Free: 800.638.3000
 Phone: 404.665.5700
 Fax: 404.665.5701
 Email: info@pangborn.com